


## 6. Electric Wiring Diagram

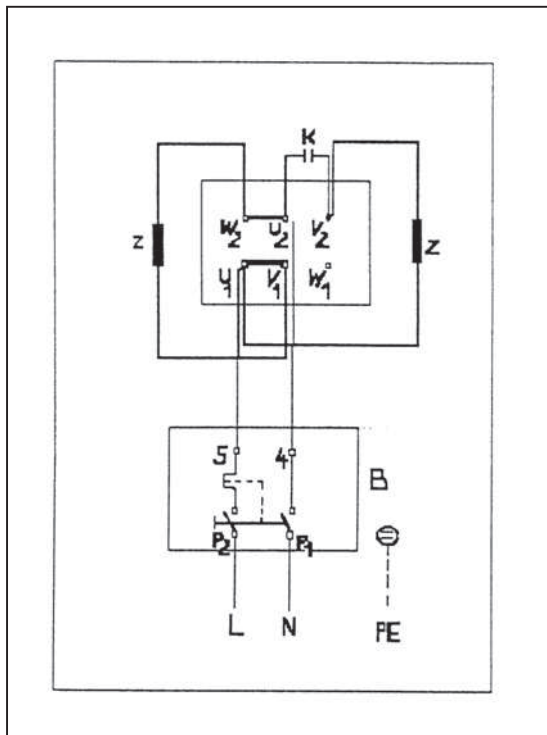

## 7. Technical Data

Technical Data	312 Profi K	314 Profi K
Flow rate, adjustable	620 l/h	760 l/h
Unloading pressure	185 bar	160 bar
Max. operating pressure	170 bar	140 bar
Recoil	33 N	30 N
Water temperature max.	60 °C	60 °C
Suction height	1 m	1 m
Normal current (50 Hz)	1~230 V	1~230 V
Driving power	3,3 HP	3,3 HP
Fuse	16 A	16 A
Total connected load	3,5 kW	3,5 kW
Detergent injection rate	10 %	10 %
Spray nozzle High Impact (PK)	3538	2538
Rocket nozzle (mm) (PK)	3 x 0,8	3 x 0,9
Rocket drill nozzle (mm) (PK)	4 x 0,7	4 x 0,8
High pressure hose	8 m	10 m
Pipe cleaning hose	22 m	22 m
Water connection	3/4" male	3/4" male
Noise level Lp/Lw According to DIN EN ISO 3744	63 /74 dB(A)	63 /74 dB(A)
Weight	34,5 kg	34,5 kg