




Minor


Electrical submersible drainage pump

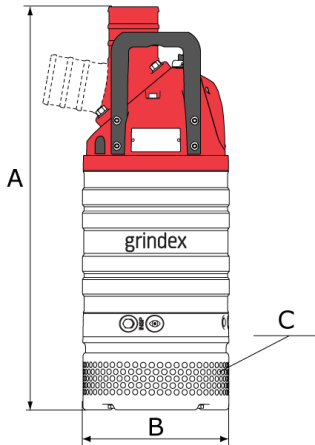


50 Hz	N	H
Discharge connection	4"	3"
Rated power P_2 [kW]	3,7	3,7
Max. power consumption P_1 [kW]	4,5	4,5
Shaft speed [r.p.m.]	2870	2870
Rated current at 230V	13 A	13 A
Rated current at 400V	7,3 A	7,3 A
Rated current at 500V	6,0 A	6,0 A
Solids passage C	10 mm	10 mm
Dimensions A / B	793 / 286 mm	793 / 286 mm
Weight	52 kg	52 kg

Other voltages on request

H (m)

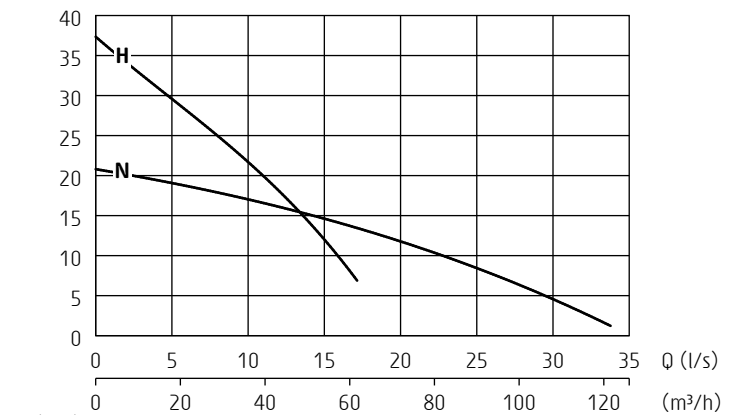

P_1 (kW)

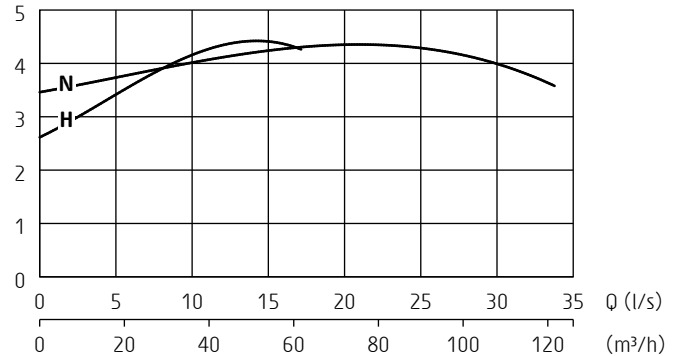

ISO 9906/A

Pump types

N: normal pressure

H: high pressure

Classification

Electrical submersible drainage pump

Protection class: IP 68

Electrical motor

Squirrel cage induction motor, insulation class: H (IEC 85)

Motor protection

Phase sequence control, phase failure guard, temperature guard with thermal contacts in the stator opening temperature 140°C (284°F) (= SMART system), air valve

Cable - SubCab

4G2,5mm², length 20 m or 14AWG/4, length 53 ft

Limitations

Max. submersion depth: 20 m (66 ft)

Max. liquid temperature: 40 °C (104 °F)

Allowed pH range: 5 - 8

Maximum liquid density: 1100 kg/m³ (68 lbs/ft³)

Shaft seals

Cartridge seal: pre-assembled double mechanical seal running in an oil compartment

Material lower seal: *tungsten carbide - tungsten carbide*

Material upper seal: *tungsten carbide - aluminium oxide*

Bearings

Ball bearings with C3 clearance

Discharge connection

3-4" hose, ISO-G or NPT

Materials

Casted parts: *Aluminium*

Outer casing: *Stainless steel*

Motor shaft: *Stainless steel*

Impeller and suction cover: *Hard-Iron™*

Diffusers: *Nitrile rubber*

Screws and nuts: *Stainless steel*

O-rings: *Nitrile rubber*

Accessories

Level regulator (max 400 V)

Zinc anodes

Tandem connection

Low suction collar

Pump raft

Specifications can be changed without notice